



Taylor Davis
...not just ANY packaging company!


Product Specification Sheet

Product Category: **CLICK PACK**

Product Title: **CURTEC 25L 4525 HDPE CLICK PACK**

Product Code: **XB025-0L002**

25 litre HDPE Click Pack*

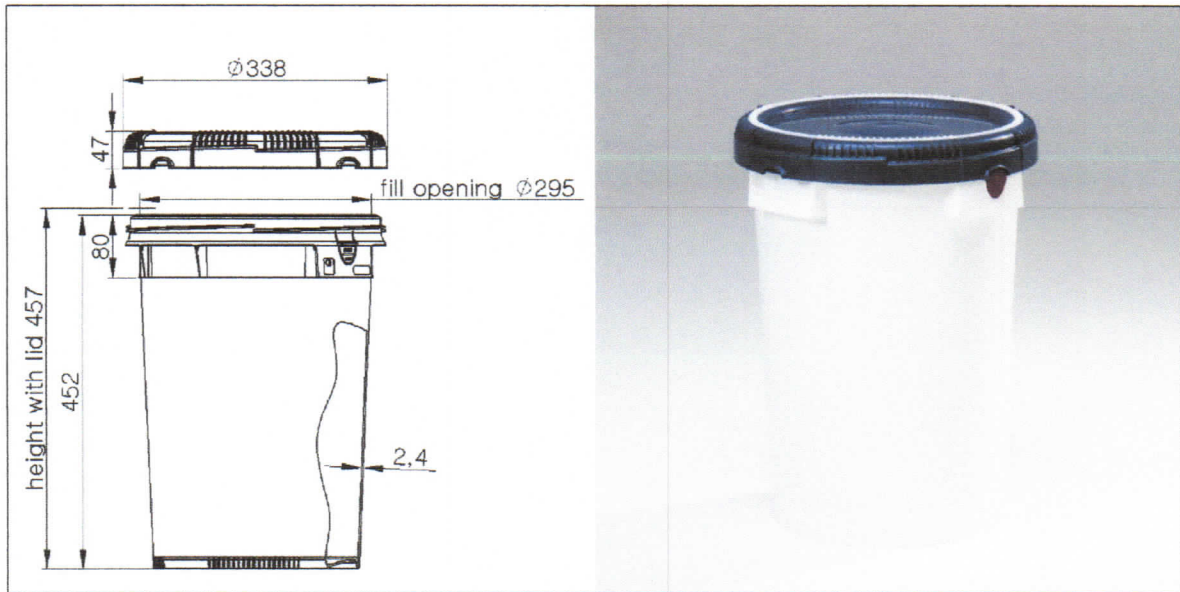

For dimensional tolerances see table on next page

Product part	Product code	Description	Materials
Container	4525-70-004	25 litre nestable container	HDPE
Lid	4502-60-611	Screw lid	HDPE
Gasket	/	Sealing gasket	TPE
Pin	4504-00-407	Tamper Evident Sealing Pin	PS

Capacity	Litres	US Gallons
Brimful	26.7	7
When closed	25	6.6

Weight	Grams	Ounces
Container	1177	41.52
Lid	350	12.35
Pin	2	0.07
Total	1529	53.93

Colours	Colour code	PMS references
Container	White 004	/
Lid	Blue 611	2767 C
Gasket	White 004	/
Pin	Red 407	188 C



Taylor Davis
...not just ANY packaging company!

Product Specification Sheet

Product Category: **CLICK PACK**

Product Title: **CURTEC 25L 4525 HDPE CLICK PACK**

Product Code: **XB025-0L002**

Hazardous material information	
Hazardous material type	Solids
Packaging group	I - II - III
UN marking	1H2/X30/S/--/B/CURTEC 000066
Maximum gross mass (kg)	X=30 Y=45 Z=67

Product identification	Container	Lid
Manufacturer ID	Bottom	--
Country of origin	Bottom	--
Product code	Bottom	--
Recycle logo / Material type	Bottom	Inside
Date clock	Bottom	Inside
UN-mark	Handgrip	--
Food logo	--	Top
Material track clock	Bottom	--

Other information
The container can be opened and closed with just a quarter-turn
The lid is locked when it passes the safety button, confirmed by a 'click'
Maximum filling temperature is 70°C/ 158°F
Contents must have cooled to 30°C/ 86°F before containers can be closed and stacked
Compliant with EU + US food safety regulations
DoC available on request
UN certificate available on request
MVTR declaration available on request
Other colours available on request
User manual available on request

Dimensional tolerance (mm) according to DIN16742-TG7																
Over	1	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	>630	>800
up to	3	6	10	18	30	50	80	120	180	250	315	400	500	630	800	1000
NW (±)	0.20	0.29	0.35	0.42	0.50	0.60	0.90	1.25	1.45	1.60	1.80	2.60	3.50	4.00	4.50	5.00

Weight tolerance
All products have a tolerance of ±4% on the initial weight mentioned on this data sheet