

# 4515

## 15 liter Click Pack<sup>x</sup>



Product part	Product code	Materials
Click Pack container	4515	HDPE

Capacity	Liters	US Gallons
Brimful	17.8	4.70
When closed	15	3.96

Hazardous material information	
Hazardous material type	Solids
Packaging group	I – II – III
UN marking	1H2/X30/S/--/B/CURTEC 000066
Maximum gross mass (kg)	X=30 Y=45 Z=67

Weight	Grams	Ounces
Click Pack container	830	29.28

**Weight tolerance**  
All products have a tolerance of  $\pm 4\%$  of the initial weight mentioned on this data sheet

**Dimensional tolerance (mm) according to DIN16742-TG7**

Over	1	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	>630	>800
up to	3	6	10	18	30	50	80	120	180	250	315	400	500	630	800	1000
NW ( $\pm$ )	0.20	0.29	0.35	0.42	0.50	0.60	0.90	1.25	1.45	1.60	1.80	2.60	3.50	4.00	4.50	5.00

Standard color(s)	Color code	PMS references
Click Pack container*	White 004	/

\* Other colors available on request

**Product identification**

Manufacturer ID	Handgrip
Product code	Bottom
Recycle logo / Material type	Bottom
Date clock	Bottom
UN-mark	Handgrip
Food logo	Bottom
Material track clock	Bottom
CFR49-mark	Bottom


**Other information**

The container can be opened and closed with just a quarter-turn  
The lid is locked when it passes the safety button, confirmed by a 'click'  
Maximum filling temperature is 70°C/ 158°F  
Contents must have cooled to 30°C/ 86°F before containers can be closed and stacked  
DoC available on request  
UN certificate available on request  
MVTR declaration available on request  
User manual available on request  
Valve optional  
Handle optional  
Sealing pin optional

#### DISCLAIMER

CurTec manufactures packaging material for a wide range of purposes. This declaration is restricted to the packaging material as it leaves the production facility. CurTec has neither control over final end use of the product nor over processing conditions. It is therefore the responsibility of the end user to check compliance with the relevant regulations and to validate material performance in the end application through proper end use testing.

© 2020 Property of CurTec International B.V. All rights explicitly reserved, it is not allowed to copy or communicate to other parties without written consent of CurTec.

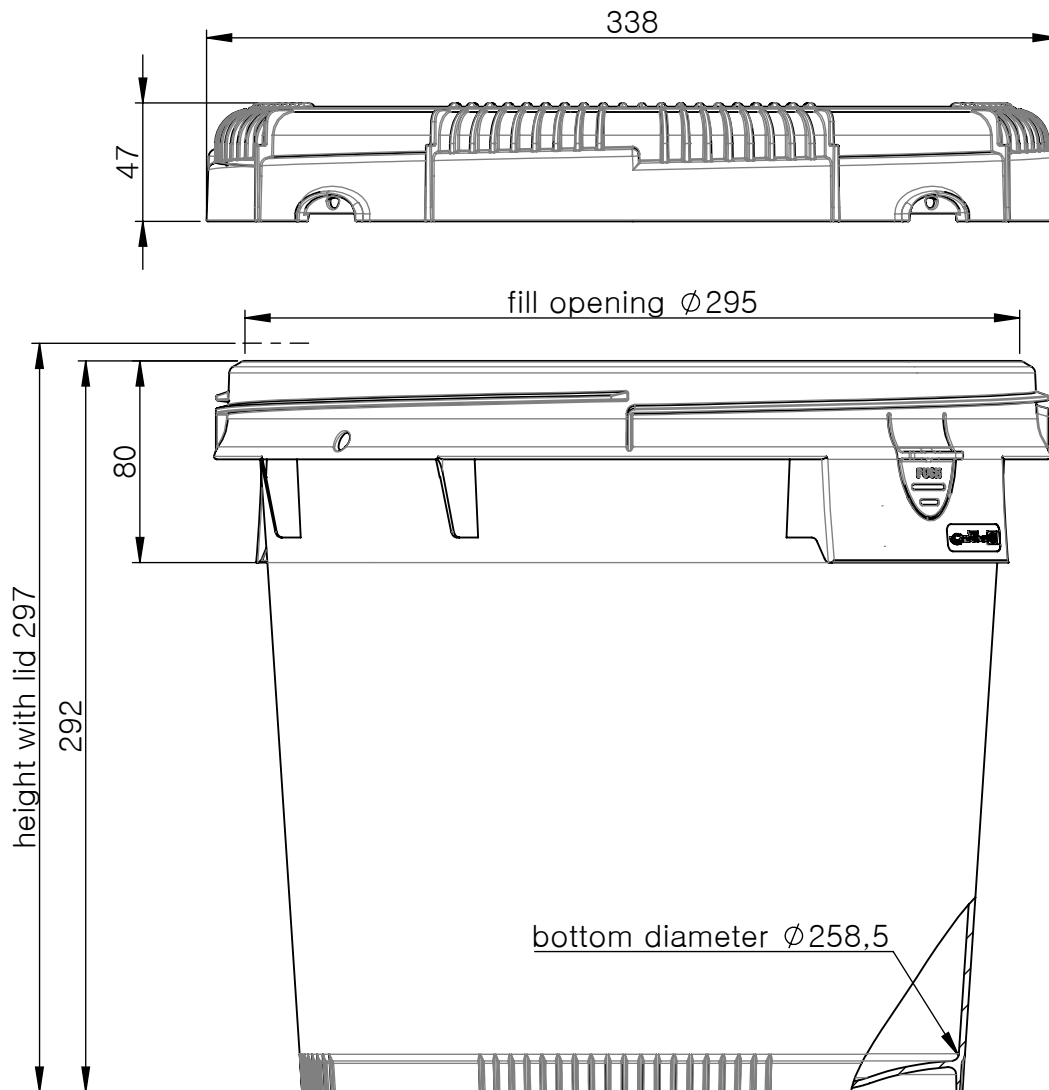

Title 4515 Click Pack X

Revision

Rev. Date

Units

1

12-09-2020

mm



This document is property of CurTec Nederland B.V.  
and may not be copied or communicated without written consent.  
All Rights Reserved

